
Product information

ADVANTAGES

- Super fast and easy preparation
- Reliable and lasting results
- Contains fungicide preventing mould growth
- Easy wallpaper sliding to perfect figures matching
- Dissolves entirely and extremely fast in cold water

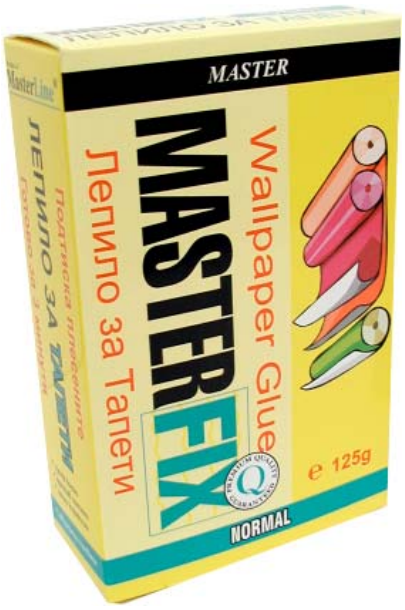

MasterFix® Normal
Wallpaper glue

APPLICATION

MasterFix®Normal has been specially designed for convenient and high-quality gluing of wall coverings of various weight and thickness such as ordinary wallpaper, novamura (penopolythene), bulky vinyl coverings, embossed wallpaper, highly embossed wallpaper. Dissolves entirely and extremely fast in water.

.

TYPICAL FEATURES

Appearance	Cream-colored flakes
Chemical structure	Combination of specially selected polymers
Water content	50 … 100 mg/g
Viscosity	6000 … 11000 mPa.s
pH	10 … 11.5
Alkalinity	5 … 9 µmol H+/0.04 g < 0.5 mg NaOH/g
Swelling volume	≥ 280 ml.
Screening analysis	250 … 725 mg/g on 1 mm clear opening sieve ≤ 70 mg/g on 250 micrometers clear opening sieve 02250
Bulk density	250…350 kg/m^3

QUANTITIES

Recommended mixing proportion:

Table 2

APPLICATION	Proportion Product/water	Product (g)	Water (l)	Area (approx.)
Primer	1 : 45	125	5.5	55 м^3
Ordinary wallpaper	1 : 32,5	125	4	5 - 6 rolls
Vinyl coverings	1 : 27,5	125	3.5	5 rolls
Novamura /penopolythene/	1 : 22,5	125	2.8	4 rolls
Bulky vinyl coverings	1 : 22,5	125	2.8	4 rolls
Embossed wallpaper	1 : 22,5	125	2.8	2 - 3 rolls
Highly embossed wallpaper	1 : 17,5	125	2.2	1,5 - 2,5 rolls

Remark: **The above figures are for information only!**

The water quantities and areas in the table above are based on a consumer packing of 125 g. If the packing is other than 125g, the water quantity and area should be recalculated.

HANDLING MODE

Surface preparation
The surfaces should be clean, oil- and dust-free of dirt that may deteriorate adhesion.
The tools used should be clean, dry and oil-free.

Priming
In the case of uneven surfaces and cracks putty with MasterCryl® Stacryl and work the joints with MasterSil® Neutral. To improve adhesion prime the surfaces with MasterFix® Normal and let them completely dry prior fixing the wallpaper. (according to Table 2)

Preparation
Measure the cold water quantity (according to Table 2), then slowly pour the package content into the water for 1 minute continuously stirring. Leave the mixture for about 3 minutes, then stir energetically till preparation of a homogeneous solution. The glue is ready to apply.

Applying
MasterFix® is ready to use after dissolving in water. Apply with a brush or roller on the wallpaper.

PRECAUTIONS
No health or work safety information is contained in this document. Prior starting work with the product read the 'Product health safety list' and the product label.

SHELF LIFE AND STORAGE

Store in closed, dry, cool and frost-protected place in well closed original packing.
Recommended storage period: not longer than 2 years. Be careful; store the product in small quantities because the water content is gradually increasing.

PACKING
MasterFix® Normal is available in 125g packing.

LIMITATIONS
No data

WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because
conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests. Seller`s sole warranty is that the product will meet the sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. . Seller specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. Unless Seller provides you with a specific, duly signed endorsement of fitness for use, Seller disclaims liability for any incidental or consequential damages. Suggestions of use shall not be taken as inducements to infringe any patent.